



GENERAL NOTES:

- ALL WORK PERFORMED SHALL IN COMPLIANCE WITH ALL PERTINENT CODES, RULES, ORDINANCE, AND REGULATIONS OF THE LOCAL AND STATE GOVERNING AUTHORITIES, AND SEPARATE "SITE SAFETY MANUAL".
- THESE DRAWINGS, BY THEIR NATURE, CAN NOT REVEAL ALL CONDITIONS THAT EXIST ON SITE. SHOULD CONDITIONS FOUND TO VARY SUBSTANTIALLY FROM THE REPORT, THE CONTRACTOR SHALL NOTIFY THE ENGINEER IMMEDIATELY.

ELECTRICAL KEYNOTES	
Key Value	Keynote Text
1	DISCONNECT AND REMOVE EXISTING PANEL. ALL CIRCUITS TO DIVERTED TO EMERGENCY PANEL 'IT' IN SERVER ROOM AT BASEMENT LEVEL. MODIFY AND EXTEND CONDUCTORS AS NECESSARY.
2	DISCONNECT AND REMOVE EXISTING PANEL. CONDUCTORS AND CONDUIT TO BE REMOVED BACK TO SOURCE.
3	EC TO FURNISH AND INSTALL NEW 100A/3P BREAKER IN EXISTING PANEL 'MDP'. BREAKER TO MATCH MAKE, MANUFACTURER, AND AIC RATING OF EXISTING PANEL.
4	EC TO FURNISH AND INSTALL NEW 60A/3P BREAKER IN EXISTING PANEL 'LV'. BREAKER TO MATCH MAKE, MANUFACTURER, AND AIC RATING OF EXISTING PANEL.

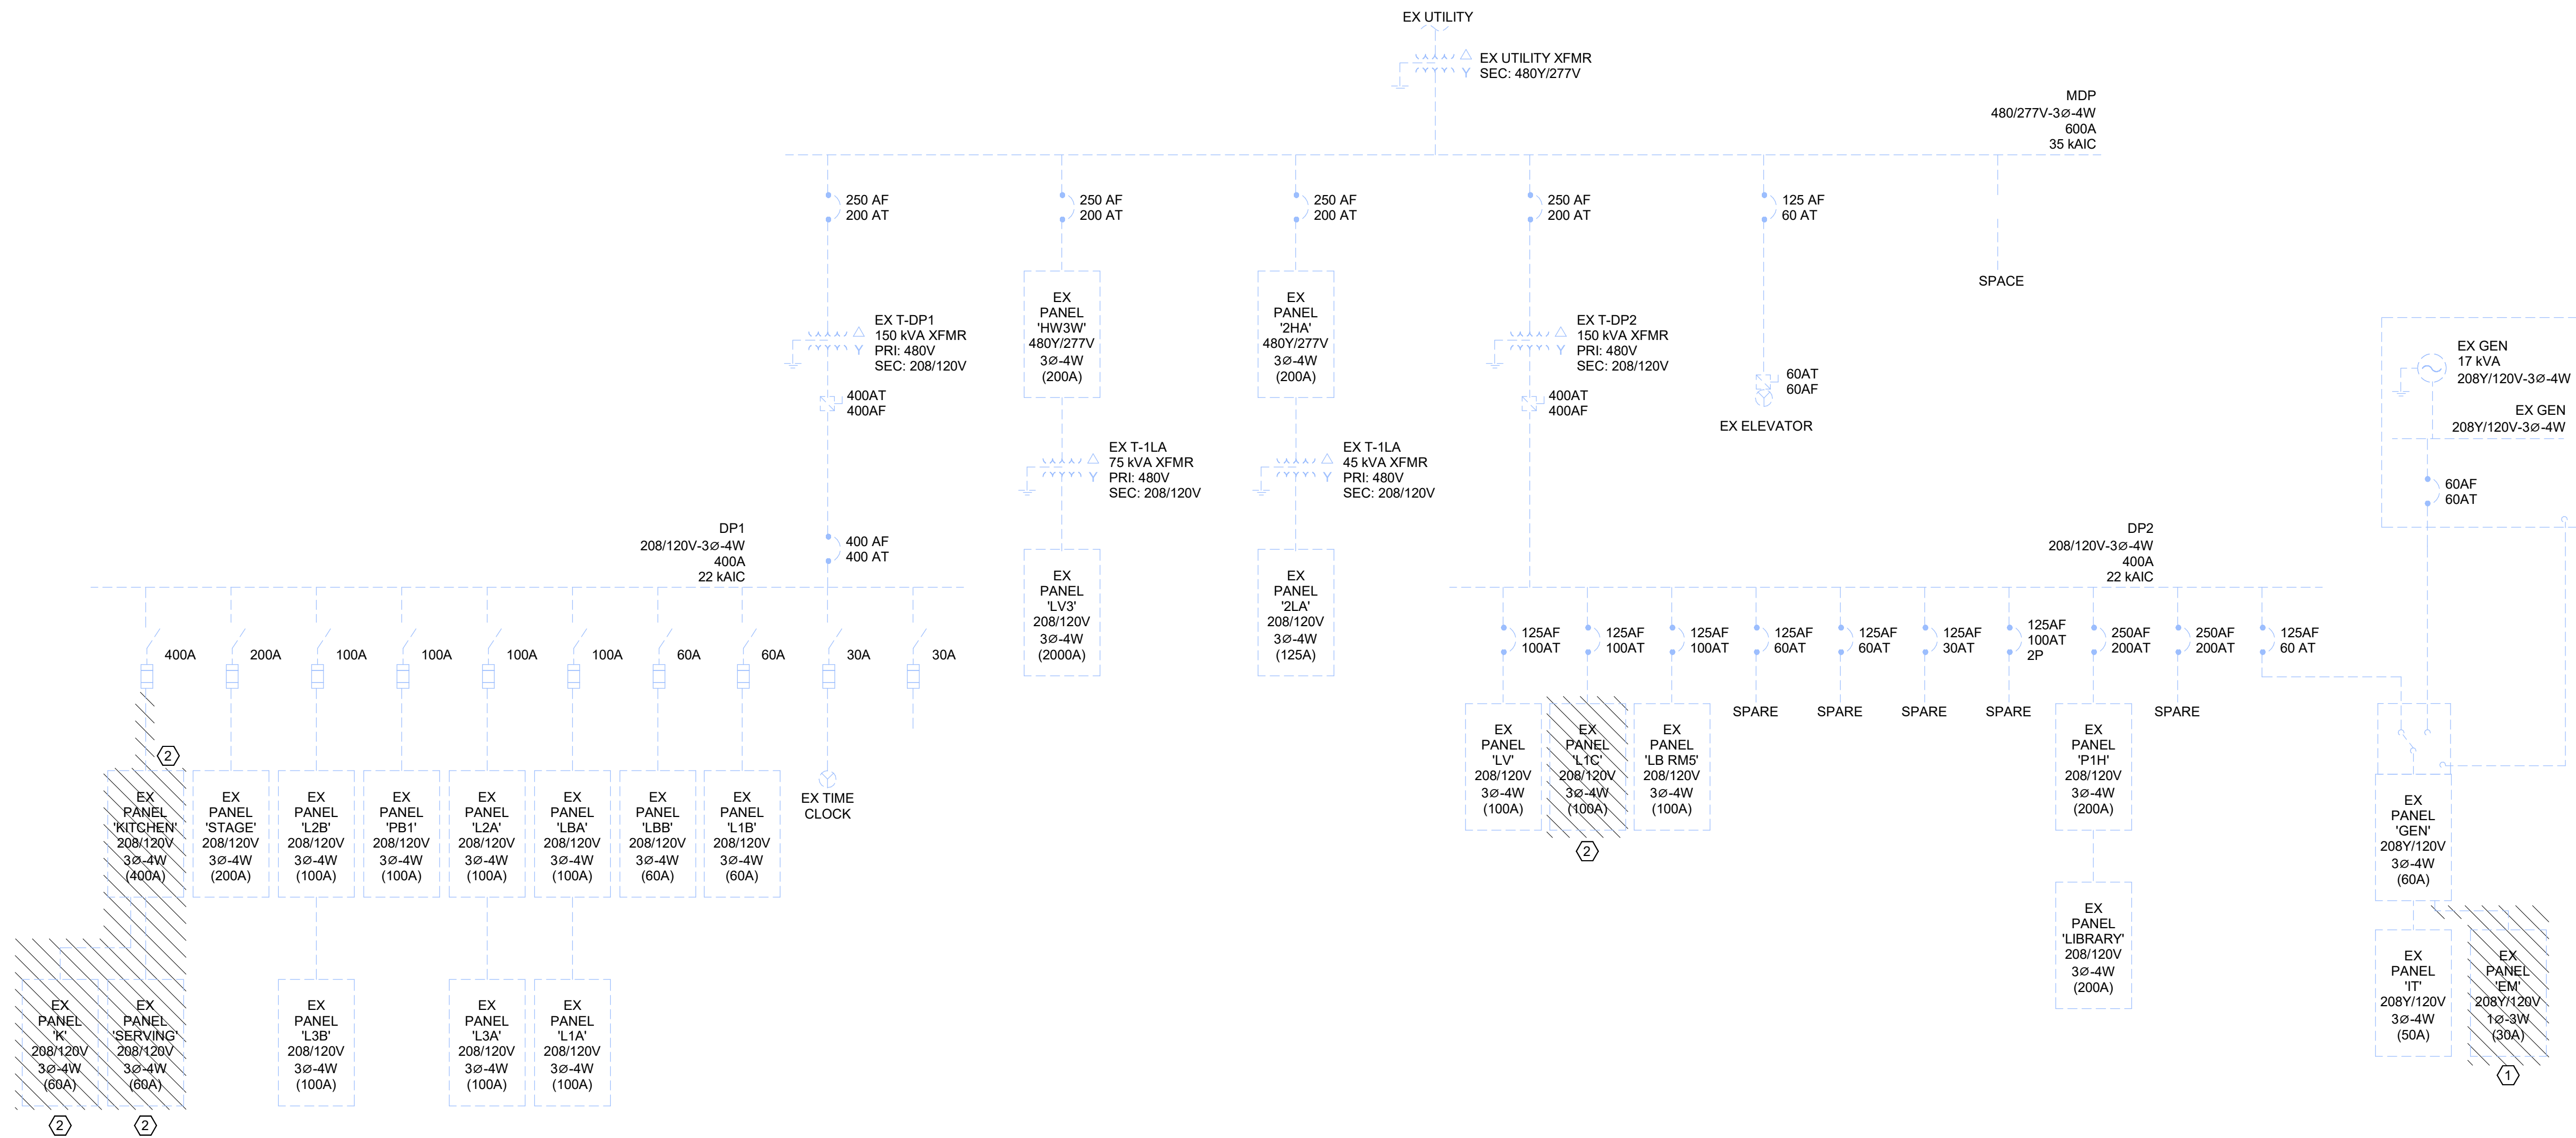

1 ONE-LINE RISER - DEMOLITION

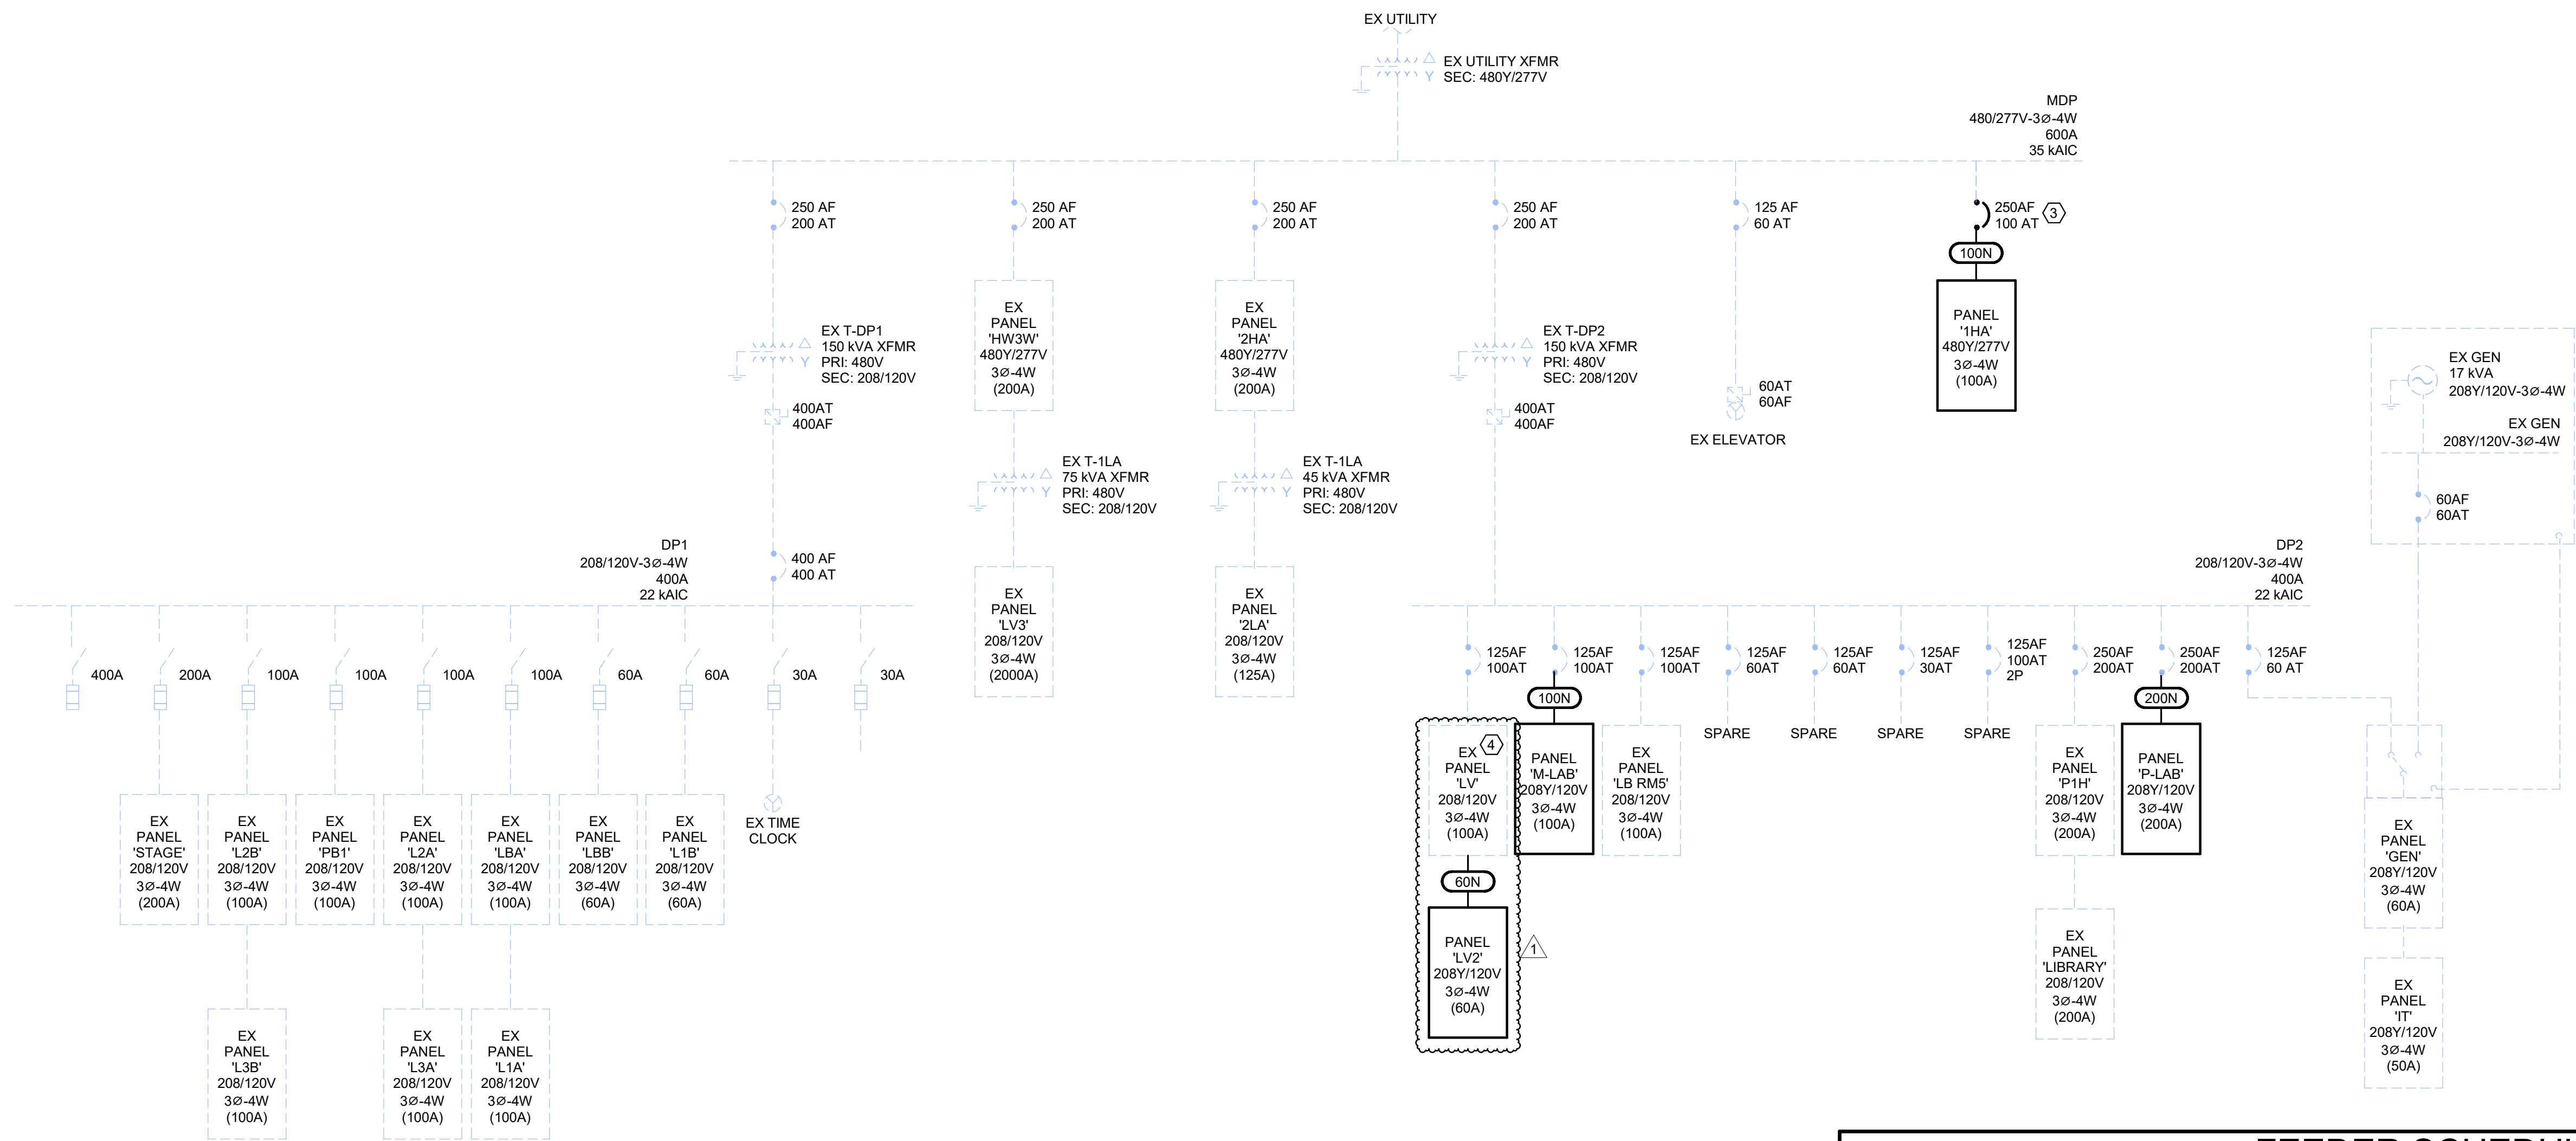

2 ONE-LINE RISE - NEW WORK

FEEDER SCHEDULE (TYPE MARK)									
FEEDER NUMBER	QTY OF SETS	PHASE CONDUCTORS		NEUTRAL CONDUCTORS		GROUND CONDUCTORS		CONDUIT SIZE	NOTES
		QTY	SIZE	QTY	SIZE	QTY	SIZE		
200N	1	3	3/0	1	3/0	6	2"		
100N	1	3	3	1	3	6	1 1/2"		
60N	1	3	4	1	4	1	1 1/4"		